

**PHILIPS
ADVANCE**



LED Driver

Xitanium

300W 120-277V 0.1-1.50A
0-10V with SimpleSet
X1300C150V300BSR1



Philips Advance Xitanium Outdoor LED Drivers with SimpleSet technology are designed to give OEMs ultimate flexibility. With wide operating windows and simple programming, luminaire manufacturers can design luminaires of different sizes and lumen levels for outdoor applications.



Specifications

Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency@ Max Load and 70°C Case	Max. Case Temp. (°C)	Input Current (A)	Max. Input Power (W)	THD @ Max. Load	Power Factor @ Max. Load	Surge Protection Common/Diff (KV)	Envir. Protection Rating
120	300	100-300	0.1-1.5	92.5	85°C	2.8	330	<10%	>0.95	4/4	UL Dry & Damp
277				93.5		1.2		<10%			

Enclosure

	In. (mm)
Case Length	8.40(213.3)
Case Width	4.61(117.1)
Case Height	1.47(37.3)
Mounting Length	8.84(224.6)
Mounting Width	2.20(55.8)
Overall Length	9.47(240.6)

Wiring Diagram

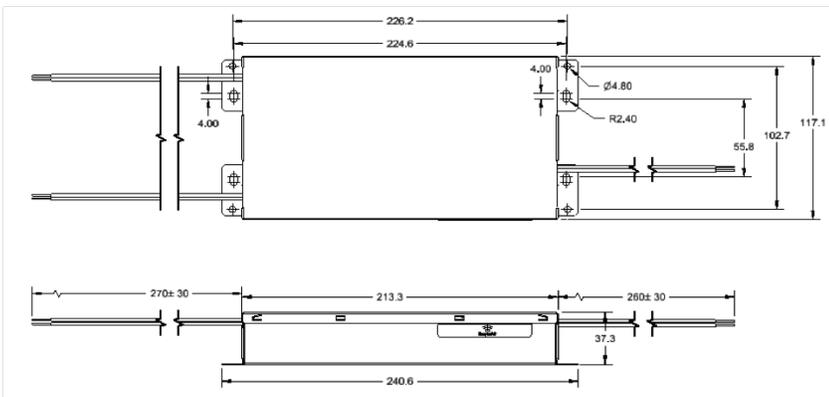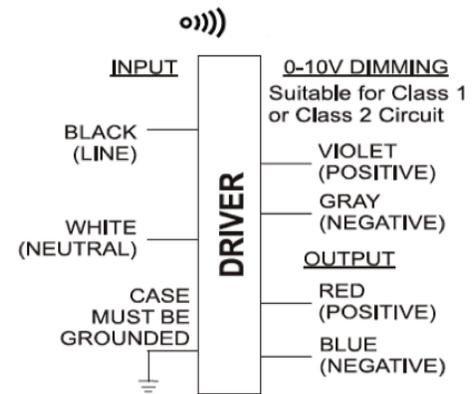

Input and output use lead-wires.

Lead-wires are 18AWG 105C/600V solid copper per UL1452.

Lead Length outside enclosure: 270 mm (±30mm) on all wires

Dimming: 270mm (±30mm)

Dimming	Dimming Range	Minimum Output Current (A)
0-10V Analog	10% ~ 100% of the setting current	0.1

Xitanium 300W 120-277V 0.1-1.50A 0-10V

Features

- 50,000+ hour lifetime¹
- Programmable output current through SimpleSet
- Large operating window

Benefits

- Enables long life luminaire designs
- Fast and simple way of programming
- Enables fixture designs with wide variety of loads and current

Application

- Area
 - Roadway
 - Parking garages
 - Floodlights
1. Philips Advance Xitanium LED Drivers are manufactured to engineering standards correlating to a designed and average life expectancy of 50,000 hours of operation at maximum rated case temperature. Minimum 90% survivals based on MTBF modeling.

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Product Data

Order Information	
Full Product Code	XI300C150V300BSR1M (Mid-Pack, 4pcs/Box)
Line Frequency	50/60Hz
Min. Mains Voltage Operational	108 Vac
Max. Mains Voltage Operational	305Vac
Output Information	
Maximum Open Circuit Voltage	400VDC
Output Current Ripple (ripple = peak to average / average)	<=15% Low frequency (\leq 120 Hz) content <5%
Output Current Tolerance (In the performance window)	<5%
Protections	Short Circuit, Open Circuit Protection for LED + and LED -, Thermal Foldback
Features	
0-10V Dimming	150 μ A source current from driver. See dim curve for detail.
AOC (Adjustable Output Current)	100mA to 1500mA via SimpleSet (Refer to Operating Window)
Adjustable Minimum Dim Level	10% or higher
Environment & Approbation	
Operating Ambient Temp. Range	-40°C to +55°C
Max Case Temperature (Tcase)	85°C
Environmental Protection Rating	UL dry and damp, Type HL
Agency Approbations	UL8750, CSA250.13
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Audible noise	<24dB Class A
Weight	4.0Lbs / 1.8kgs

Xitanium 300W 120-277V 0.1-1.50A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve


Dimming source current from the driver: 150µA (@ 0<Vdim<8V)

Minimum Dim Level: Factory default 10% of Iout (minimum 100mA), can be programmed to a higher level via SimpleSet

Maximum output voltage on the dimming wires: 12V

Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with sthis driver
Leviton	IllumaTech IP7 series
Philips	Sunrise - SR1200ZTUNV

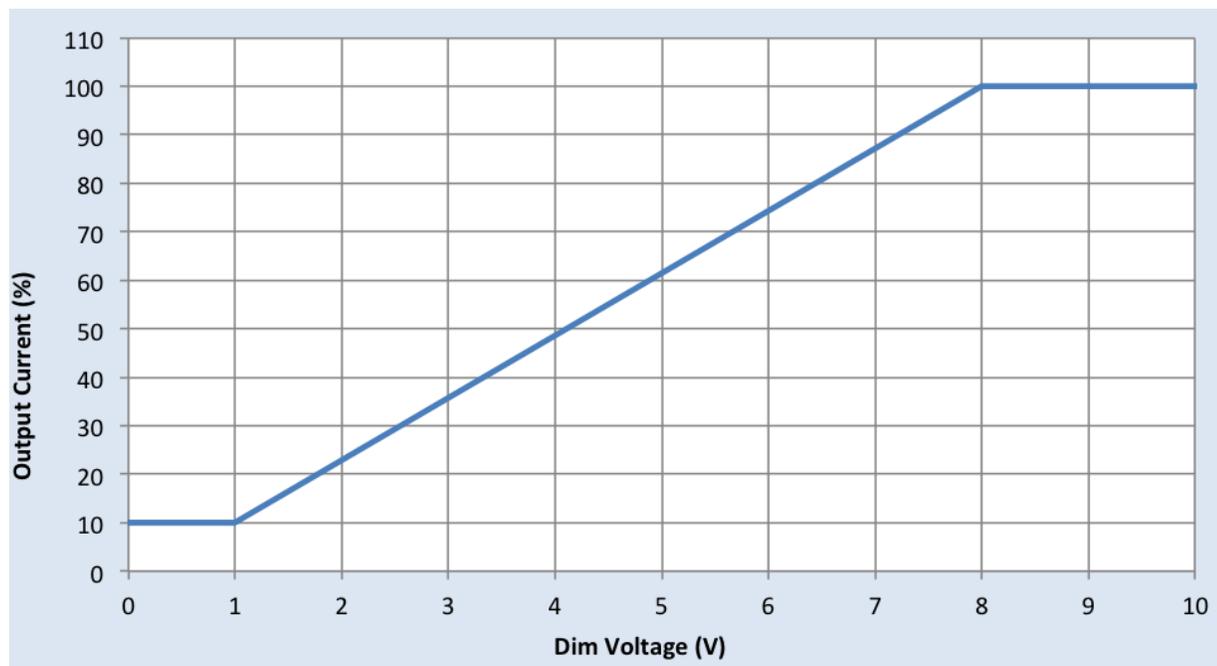


Xitanium 300W 120-277V 0.1-1.50A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Operating Window

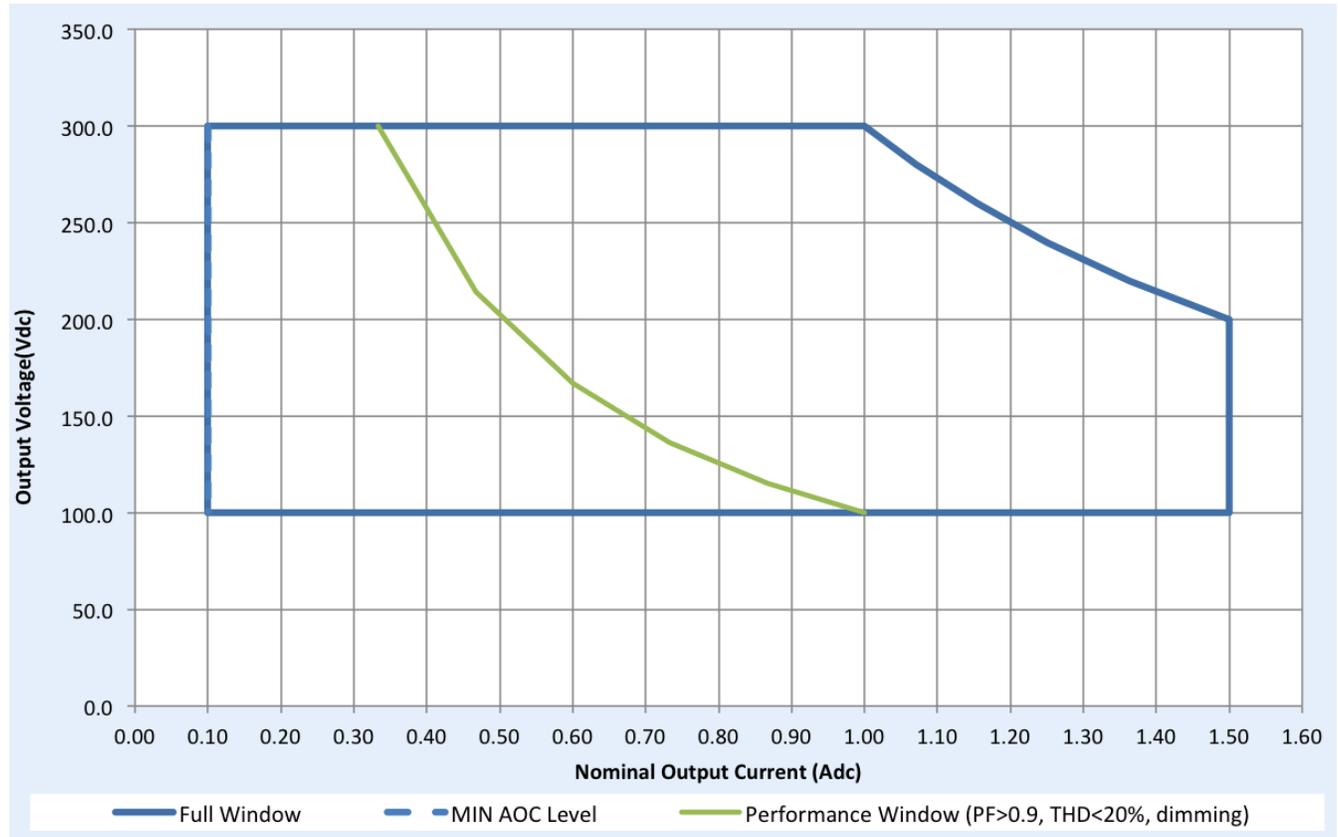

Notes


1. Factory default output current is 1.05A.
2. For 10% dimming output current setting through AOC should be >1A.

Xitanium 300W 120-277V 0.1-1.50A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.


Output Current Vs. Driver Case Temperature

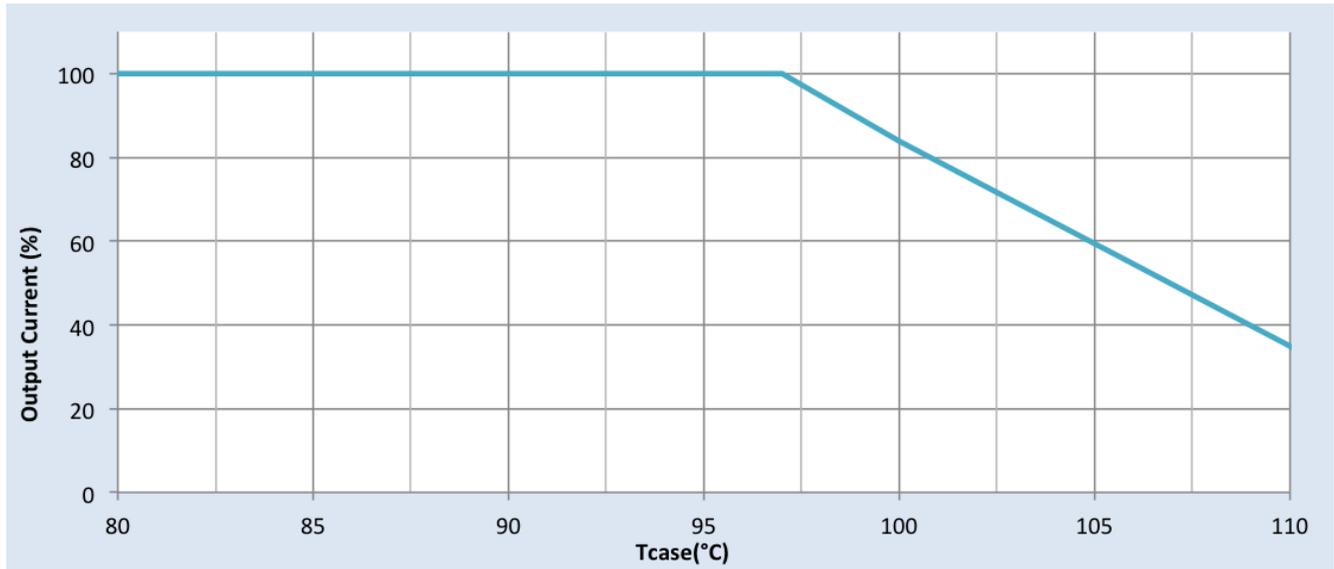

Notes

There is $\pm 5^\circ\text{C}$ tolerance on the driver case temperature.

Driver Lifetime vs. Driver Case Temperature

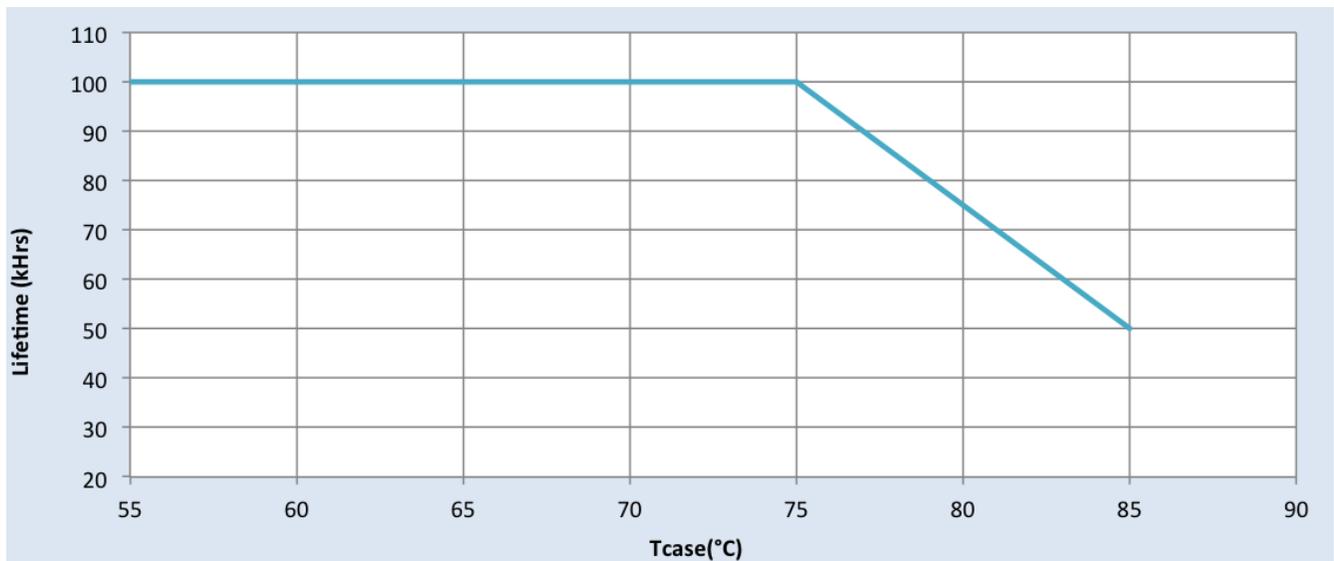


Xitanium 300W 120-277V 0.1-1.50A 0-10V


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Efficiency Vs. Output Voltage at 120Vac

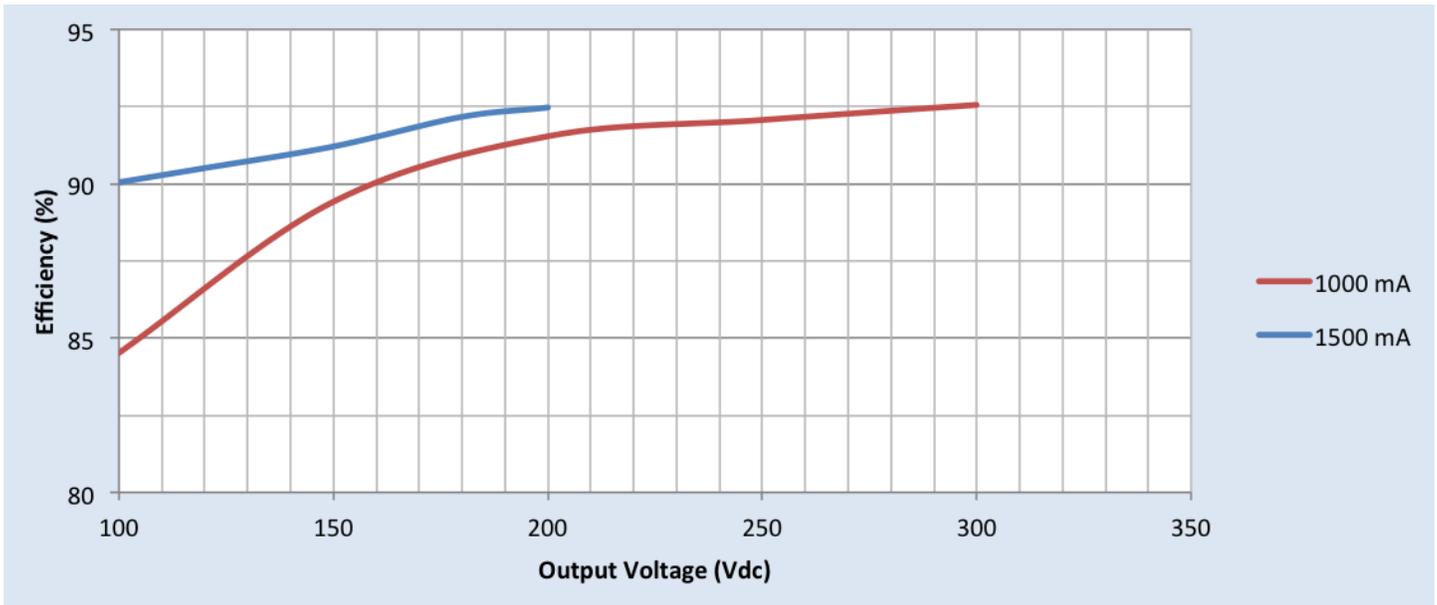

Efficiency Vs. Output Voltage at 277Vac

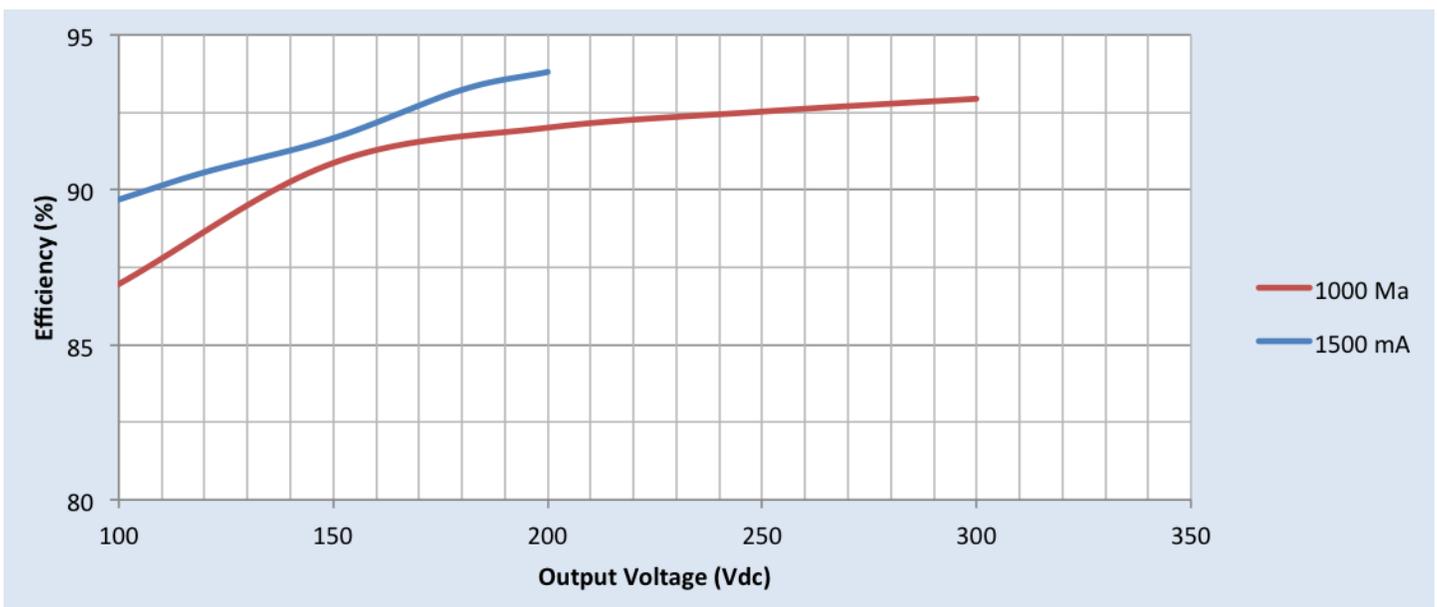


Xitanium 300W 120-277V 0.1-1.50A 0-10V


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor Vs. Output Power

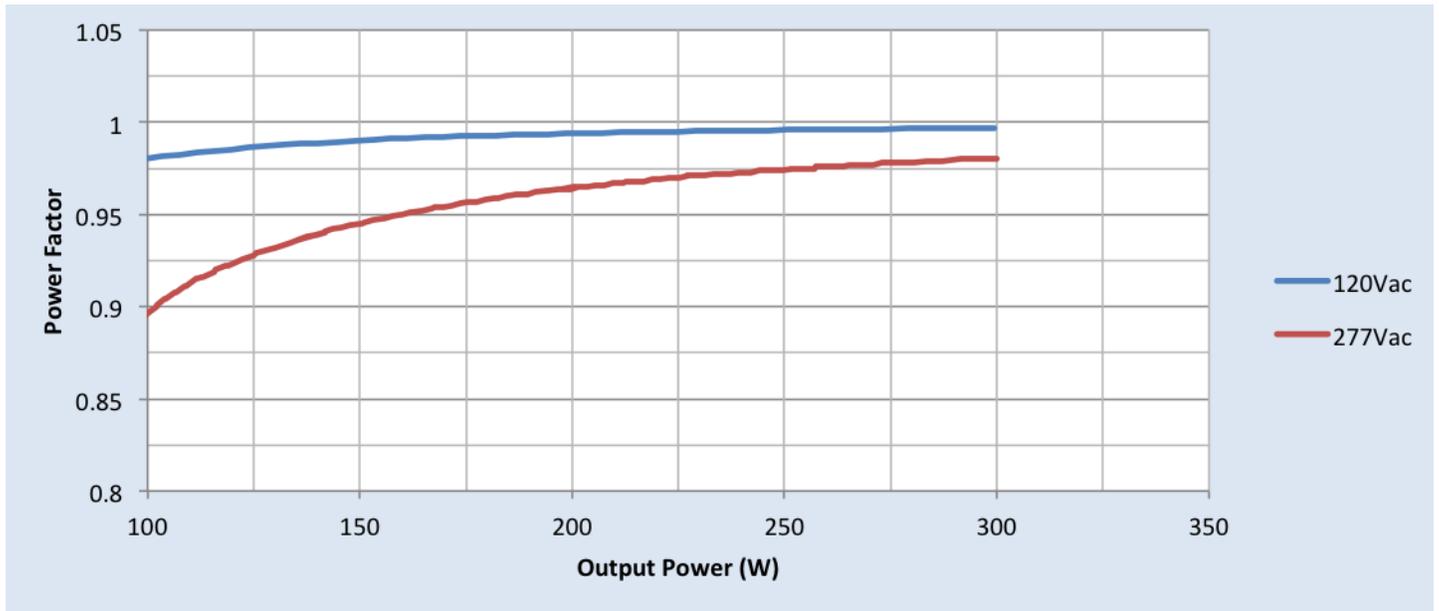


Total Harmonic Distortion (THD) Vs. Output Power

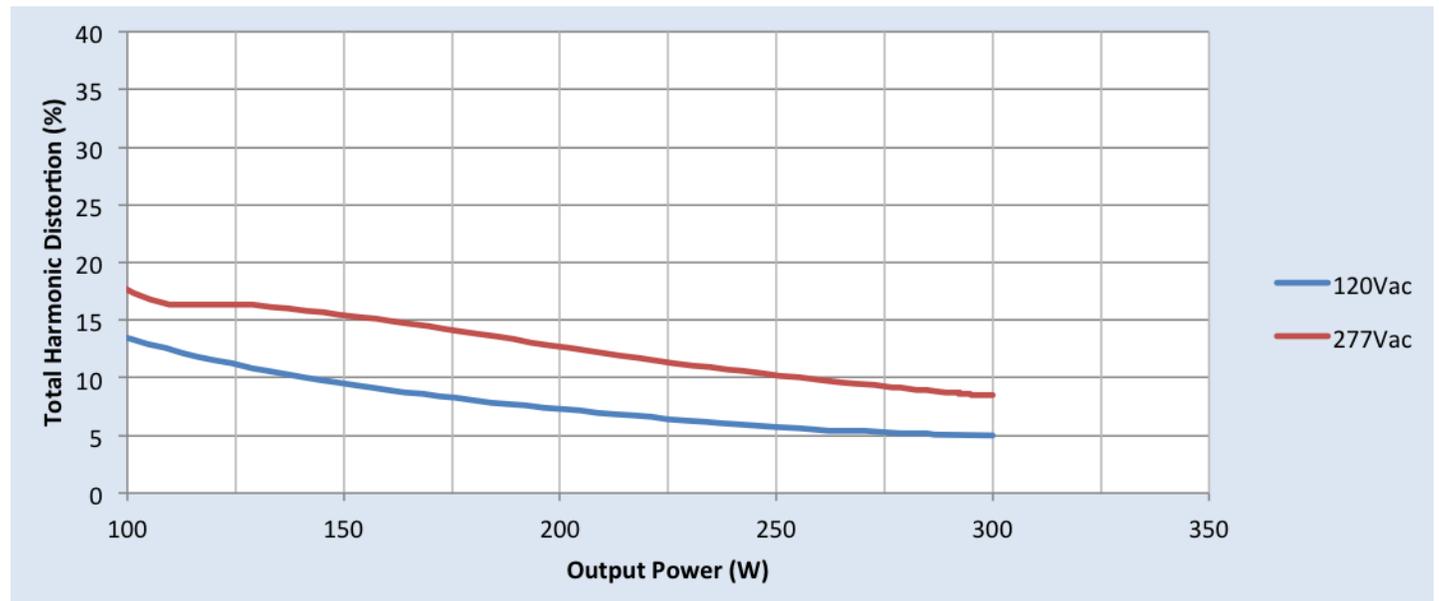

Xitanium 300W 120-277V 0.1-1.50A 0-10V

Inrush Current Info

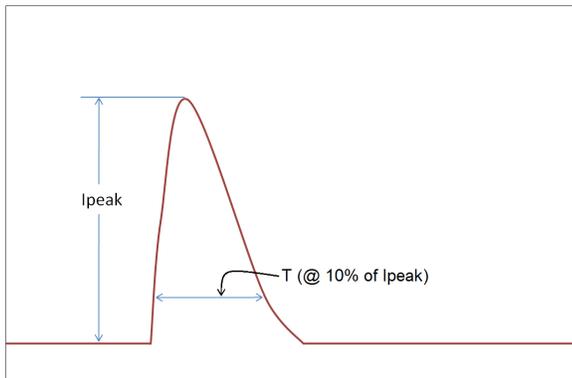

V_{in}	I_{peak}	T (@ 10% of I_{peak})
120 Vrms	107	180 μ S
277 Vrms	289	220 μ S

Inrush current is measured at peak of the corresponding line voltage. Source impedance per NEMA 410.

Lightning Surge Info

ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
1.2/50 μ s Combination Wave (w/t 2 Ω)	4kV	4kV

Isolation

Isolation	Input	Output	0-10V (Class 2)	Enclosure
Input	NA	2xU+1kV	2xU+1kV	2xU+1kV
Output	2xU+1kV	NA	2xU+1kV	2xU+1kV
0-10V (Class 2)	2xU+1kV	2xU+1kV	NA	2xU+1kV
Enclosure	2xU+1kV	2xU+1kV	2xU+1kV	NA

U = Max input voltage

UL Conditions of Acceptability

Please contact your Philips representative for a copy of the latest UL Conditions of Acceptability (COA).

© 2015 Koninklijke Philips N.V. All rights reserved.
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.
philips.com/leddrivers



Philips Lighting North America Corporation
10275 W. Higgins Road, Rosemont IL 60018
Tel: 800-322-2086 Fax: 888-423-1882
Customer/Technical Service: 800-372-3331
OEM Support: 866-915-5886

Imported by: Philips Lighting
A division of Philips Electronics Ltd.
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008