


COMPONENT OVERVIEW



IP65 Version

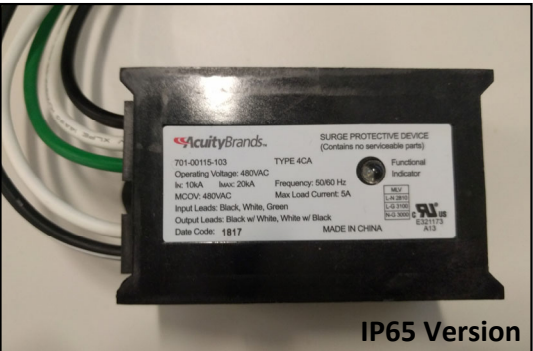

Model Numbers

- 120-277V: 701-00115-001
- 701-00115-101 (IP65 version)
- 347-480V: 701-00115-003
- 701-00115-103 (IP65 version)

ELECTRICAL	
Nominal Operating Voltage	120-277 VAC or 347-480 VAC
Line Frequency	50/60 Hz
Load Current	120-277V: 7A Max. 347-480V: 5A Max.
Ambient Temperature	85°C Max.
Fixture Failure Mode	Fixture OFF
Indicator Light	Yes - ON indicates SPD is functional

STANDARDS

UL Recognized Component in U.S. and Canada (**UL1449**)
UL Categories: **VZCA2/VZCA8** (Surge Protection Devices)
UL File: **E321173** | UL SPD Type: **4CA**
Meets ANSI C136.2 – **Extreme Category (20kV / 10kA)**
Meets ANSI/IEEE C62.41-2002: **Category C High (10kV/10kA)**
Vibration: IEC 60068-2-6

WIRING DIAGRAM

